Canon

SMALL IN STATURE, **BIG ON RESULTS.**

Boasting the latest printing technology, smart features and a compact footprint, the imageRUNNER ADVANCE DX C3700i Series is ideally suited to mid-sized offices.

Canon imageRUNNER ADVANCE DX C3700i Series

Colour Multifunction Device

E PERFORMANCE

Manage your projects with ease thanks to intuitive design and advanced printing capabilities

- A3 mid-to-low-volume colour devices with two speeds.
- Large 10.1 inch WSVGA full colour touchscreen designed for a user-friendly experience and intuitive operating feel.
- Advanced scanning technology can dramatically reduce time spent naming and saving scanned files to your cloud storage service*.
- Vivid and vibrant colour delivers a crisp, even finish.
- Optional space-saving Inner Finisher incorporates Eco Staple, Staple, and Staple On-demand functionalities.
- My ADVANCE functions allow users to create their own personalised experience, tailored to meet their unique needs.



Designed to help achieve environmental goals

- Motion sensors and sleep recovery triggers work to reduce unnecessary power consumption.
- Bio-based plastics are used throughout the machine for an environmentally friendly approach to printing performance.



Seamlessly integrate with key line-ofbusiness systems

- IT and office automation smoothly aligns thanks to a common source code for firmware and Canon's powerful Multifunctional Embedded Application Platform (MEAP).
- Personalised workflows give users the ability to take control of the way they want to manage their information so that it works best for them.
- Scan to myself and Google Drive[™] plus other popular cloud destinations to enhance workflow efficiencies*.



Streamline workflows while managing costs

- Forced Job Hold reduces paper and toner wastage.
- Ability to change print settings at the device allows for extra control over jobs.
- Blank page removal comes standard and works to reduce paper wastage.
- Track usage and control your costs utilising Canon's uniFLOW Online Express free software.





Workers and contractors can achieve ultimate freedom and flexibility with Expanded Mobile OS Support

- Mobile workflows are set up with built in Wi-Fi and mobile applications to easily allow users to connect, print, scan and capture using Canon PRINT Business.
- Full support for Apple[®] Airprint[®] and Android[™] Mopria[™] Mobile Printing.
- Simple and easy mobile connectivity with in-built Wi-Fi plus options to connect through Bluetooth and Near Field Communication (NFC).



Advanced standard security feature set to help safeguard sensitive information and assist in regulatory compliance


- The device boot process, firmware, and applications are verified upon start up. In conjunction with McAfee Embedded Control[™] which utilises a whitelist to protect against malware, the device is protected from tampering or alterations of firmware and applications.
- Security Information and Event Management (SIEM) system integration helps provide real-time insights into potential threats to the network and printers.
- Ensure data is secure with HDD encryption.
- Technology to verify that the device boot process, firmware, and applications initialise without alterations or tampering.

* Requires uniFLOW Online Express, Online or Cloud Image Processing subscription.

ADVANCED SCANNING

uniFLOW Online's Filing Assist* saves you time, reduces keying errors and brings consistency to your filing so you can find what you need, when you need it, anywhere you have internet access; at home, work or on the go.

Filing Assist uses pre-configured workflows that scan batches of repetitive documents including invoices, delivery notes, picking lists and orders to popular cloud services. Not only are they scanned, they are named, converted and filed – based on rules and information from the document.

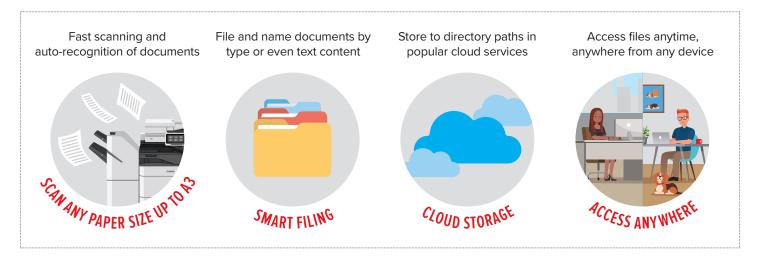

* Filing Assist is available with uniFLOW Online 2020.2 and requires a Cloud Image Processing subscription.

CONFIGURATION



Inner 2 way tray

- Separates copies, prints and faxes
- Adds a second internal output tray



Inner finisher

- 2-tray, 600 sheet capacity
- Corner and double stapling up to 50 sheets (80 gsm)
- Supports Eco stapling 4 sheets (80 gsm) and Staple On-demand 40 sheets (80 gsm)





Utility tray

Copy tray



Booklet Finisher

- 2-tray, 3,250 sheet capacity
- Corner and double stapling up to 50 sheets (80 gsm)
- Booklet-making up to 20 sheets and non-staple saddle folded capacity up to 3 sheets (A3/A4R)
- Supports Eco stapling 4 sheets (80 gsm) and Staple On-demand 50 sheets (80 gsm)
- Supports optional internal 2/3 and 2/4 hole inner punchers



Staple Finisher

- 2-tray, 3,250 sheet capacity
- Corner and double stapling up to 50 sheets (80 gsm)
- Supports Eco stapling 4 sheets (80 gsm) and Staple On-demand
- 50 sheets (80 gsm)
- Supports optional internal and 4 hole inner punchers



imageRUNNER ADVANCE DX C3700i SERIES SPECIFICATIONS

Main Unit	
Type	A3 Colour Laser Multifunctional
Core Function Processor	Print, Copy, Scan, Send, Store and Optional Fax 1.75 GHz Dual Core Processor
Control Panel	10.1" TFT LCD WSVGA Colour Touch Panel
Memory	Standard: 3.0 GB RAM
Hard Disk Drive	Standard": 320 GB (Available Disk Space: 250 GB) Optional: 1TB * A different Initial HDD may be used.
Interface Connection	Network: Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Low Energy
	Others: Standard: USB 2.0 x 1 (Host), USB 3.0 x 1 (Host), USB 2.0 x 1 (Device) Optional: Serial Interface, Copy Control Interface
aper Supply Capacity (A4, 80 gsm)	Standard: 1,200 Sheets 2 x 550-sheet Cassettes, 100-sheet Multi-purpose Tray Maximum: 2,300 Sheets (with Cassette Feeding Unit-AP1)
Paper Output Capacity (A4, 80 gsm)	Standard: 250 Sheets Maximum: 3,450 Sheets (with Staple Finisher-AA1 or Booklet Finisher-AA1 and Copy Tray-J2)
inishing Capabilities	Standard: Collate, Group With Options: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On-demand
Supported Media Types	Multi-purpose Tray: Thin, Plain, Heavy, Recycled, Coated*, Colour, Tracing, Bond, Transparency, Label, Pre-punched, Envelope *SRA3 is unsupported for Coated (257–300 gsm) and Heavy (257–300 gsm) paper. Upper Cassette: Thin, Plain, Heavy, Recycled, Colour, Bond, Transparency, Pre-punched, Envelope Lower Cassette: Thin, Plain, Heavy, Recycled, Colour, Bond, Transparency, Pre-punched, Envelope
	* Envelope Feeder Attachment A (standard) is required.
Supported Media Sizes	Multi-purpose Tray: Standard Size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 98.4 × 139.7 mm to 320.0 × 457.2 mm Free Size: 98.4 × 139.7 mm to 320.0 × 457.2 mm Envelopes: COMIO No10, Monarch, LD, LSO-C5 Envelope Custom Size: 98.0 × 98.0 mm to 320.0 × 457.2 mm Upper Cassette: Standard Size: 4A, A5, A5R, A6R, B5 Custom Size: 105.0 × 148.0 mm to 297.0 × 215.9 mm Envelopes: ISO-C5 Lower Cassette: Standard Size: A, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 105.0 × 148.0 mm to 304.8 × 457.2 mm Envelopes: COMIO No10, Monarch, DL
Supported Media Weights	* Envelope Attachement A (standard) is required. Multi-purpose Tray: 52 to 300 gsm*
supported media weights	* SRA3 is Unsupported for Coated (257–300 gsm) and Heavy (257–300 gsm) Paper. Upper/Lower Cassette: 52 to 220 gsm Duplex: 52 to 220 gsm
Warm-up Time	Colick Startup Mode: 4 seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Deep Sleep Mode: 10 seconds or less From Power On: 10 seconds or less*
Dimensione (Mar David)	* Time from device power on, until copy ready (not print reservation).
Dimensions (W x D x H) nstallation Space (W x D)	Standard (with Single Pass DADF): 565 x 722 x 887 mm Basic: 978 x 118 mm (with Single Pass DADF + right cover open + Multi-purpose Tray Extension Extended + Paper Cassette Open) Fully Configured: 1,651 x 118 mm (with Single Pass DADF + Staple Finisher-AA1/Book Finisher-AA1 + Copy Tray-J 2 Extension Extended + Paper Cassette Open)
Weight	Standard (with Single Pass DADF): Approx. 80.6 kg Including Toner
Print Specifications Print Speed (BW/CL)	iR-ADV DX C3730i: Up to 30 ppm (A4,A5,A5R,A6R), Up to 15 ppm (A3),
nint Speed (BW/CL)	Up to 20 ppm (A4R) IR-ADV DX C3720i: Up to 20 ppm (A4,A5,A5R,A6R), Up to 15 ppm (A3), Up to 20 ppm (A4R)
Print Resolution (dpi)* ' Laser Resolution Page Description Languages	600 x 600, 1200 x 1200 (Half-speed) Standard: UFRII, PCL6
	Optional: Adobe® PostScript® 3 TM
Direct Print Printing from Mobile and Cloud	Supported File Types: PDF, EPS, TIFF/JPEG and XPS AirPrint®, Mopria", Google Cloud Print", Canon Business Print, and uniFLOW Online. range of software and MEA/Phased solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending
Fonts	your requirements. Please contact your sales representative for further information. PCL Fonts: 93 Roman, 10 Bitmap Fonts, 2 OCR Fonts, Andalé Mono WT J/K/S/T* ¹ (Japanese, Korean, Simplified and Traditional Chinese), Barcode Fonts* ² PS fonts: 136 Roman
	1 Requires Optional PCL International Font Set-A1 *2 Requires Optional Barcode Printing Kit-D1
Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing Forced Hold Printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Dperating System As of July,2019.	UFRI: Windows® 7/8.1/0/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/ Server 2016/Server 2019, Mac OS X (1010 on tater) PCL: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/ Server 2016/Server 2009 PS: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/ Server 2016/Server 2009, Mac OS X (10:10 or later) PDP: Windows® 7/8.1/10, Mac OS X (10:30 or later)
Copy Specifications	
Copy Speed (BW and CL)	IR-ADV DX C3730I: Up to 30 ppm (A4, A5, A5R, A6R), Up to 15 ppm (A3), Up to 20 ppm (A4R) IR-ADV DX C3720I: Up to 20 ppm (A4, A5, A5R, A6R), Up to 15 ppm (A3),
First-Copy-Out Time (A4, BW/CL)	Up to 20 ppm (A4R) Approx. 5.9/8.2 seconds or less
Copy Resolution (dpi)	600 × 600
Aultiple Copies	Up to 999 copies
Copy Density Agnification	Automatic or Manual (9 Levels) Variable Zoom: 25% to 400% (1% Increments) Preset Reduction/Enlargement: 25%, 50%, 61%, 70%, 81%, 86%, 100% (1:1), 115%, 122%
Copy Features	141%, 200%, 400% Preset R/E Ratios by Area, Two-sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Mirror Image, Copy ID Card, Skip Blank Pages, Fro Size Original, Colour Mode, Reserved Copy, Copy Sample
Scan Specifications	
Type	Standard: Single Pass Duplexing Automatic Document Feeder* (2-sided to 2-sided (Automatic with DADF)) * Detect Feeder Multi Sheet Feed is Supported.
Document Feeder	Up to 200 Sheets
Paper Capacity (80 gsm)	
Acceptable Originals and Weights	Platen: Sheet, Book, and 3-Dimensional Objects Document Feeder Media Weight: 1-sided Scanning: 38 to 220 csm (BW, CL)

Platen: Sheet, Book, and 3-Dimensional Objects Document Feeder Media Weight: 1-sided Scanning: 38 to 220 gsm (BW, CL) 2-sided Scanning: 38 to 220 gsm (BW, CL) An acceptable weights of AGR or smaller is 50 to 220 gsm.

Platen Max. Scanning Size: Up to 297.0 x 431.8 mm
Document Feeder Media Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom Size: 70.0 x 139.7 mm to 304.8 x 431.8 mm
1-sided Scanning; 135/135 (300 x 300 dpi, Send), 51/51 (600 x 600 dpi, Copy) 2-sided Scanning; 270/270 (300 x 300 dpi, Send), 51/51 (600 x 600 dpi, Copy) Scan for Copy; 600 x 600
Scan for Servi (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Servi (Push) 600 x 600 Scan for Fax: 600 x 600 Colour Network ScanGear2. For both TWAIN and WIA
Supported OS: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016
Push Scan, Pull Scan, Scan to Box, Scan to Advanced Box, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud (uniFLOW Online)
Standard: E-mail/Internet FAX (SMTP) SMB 3.0 FTP WebDAV Mail Box
Optional: Super G3 FAX, IP Fax LDAP (2,000)/Local (1,600)/Speed dial (200)
Push: Up to 600 x 600
Pull: Up to 600 x 600 File: FTP (TCP/IP), SMB 3.0 (TCP/IP), WebDAV
E-mail/I-Fax: SMTP, POP3 ' " Standard: TiFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimise for Web, PDF/A-fb, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS
(Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Raito, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/ Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals
2
Super G3: 33.6 kbps
G3: 14.4 kbps
MH, MR, MMR, JBIG 400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending: A3, A4, A4R, A5*', A5R*', B4, B5*², B5R*' Receiving: A3, B4, A4, A4R, A5R , B5, B5R
*1 Sent as A4 *2 Sent as B4 Short
Up to 30,000 Pages (2,000 Jobs) Max. 200
Max. 200 Max. 199 Dials
Max. 256 Addresses Yes
Yes Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on Log
100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 Jobs) Stored
Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 81/10 Concurrent Connections (Max): SMB: 64, WebDAV: 3
Standard: 16 GB
(With Option: Max. 480 GB) Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a
Password, Search, File Preview, Authentication Management, Open to Public, URI TX, Backup/Restore
Standard: User Authentication (Picure Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level
Login), Access Management System (Access Control) Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print"), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Box Access Control), Send Data Security (Setting for Requesting Password Input Per Transmission, Restricted E-mail/File Send Functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) * Requires unFLOW Online/unFLOW.
TLS 1.3, IPSec, IEEE802.1X Authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wirel LAN), Disabiling Unused Functions (Enabling/Disabiling Protocols/Applications, Enabling/Disabiling Remote UI, Enabling/Disabiling USB Interface), G3 FAX Separation from LAN, USB Port Separation from LAN, Prohibit the Execution of Files Stored in Advanced Box in the MFP, Scan and Send-virus Concerns for E-mail Reception
Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwri Erase, HDD Lock), Standard HDD Initialise, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integri (Verify System at Startup, Runtime Intrusion Detection)
Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting
Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
220–240V, 50/60Hz, 4A Maximum: 1,500 W
Maximum, 1300 W Standby: Approx. 45.1 W ⁺¹ Sleep Mode: Approx. 0.8 W ⁻² *1 Reference Value: Measured One Unit. *2 0.8 W Sleep mode is not available in all circumstances due to certain settings.
NPG-67 Toner BK/C/M/Y
NPG-67 Toner BK: 36,000 Pages
NPG-67 Toner C/M/Y: 19,000 Pages
nent Universal Login Manager (ULM), uniFLOW Online Express
eMaintenance, Content Delivery System
Network ScanGear
Canon Driver Configuration Tool, NetSpot Device Installer MEAP (Multifunctional Embedded Application Platform)
Paper Capacity: 550 Sheets x 2 Cassettes (1/00 sheets) (80 gsm) Paper Type: Thin, Plain, Recycled, Colour, Heavy, Bond, Transparency, Pre-punched Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Custom Size (105.0 x 148.0 mm to 304.8 x 457.2 mm) Paper Weight: E2 to 220 gsm
Power Source: From the Main Unit Dimensions (W x D x H): 565 x 615 x 248 mm Weight: Approx. 16.0 kg

imageRUNNER ADVANCE DX

Output Options Copy Tray-J2	Capacity (with 80 gsm paper):
.opy Iray-J2	A4, A5R, B5, B5R: 100 Sheets
	A3, A4R, B4: 75 Sheets
	Dimensions (W x D x H): 444 x 373 x 176 mm (attached to the main unit, when the extension tray is extended)
	Weight: 0.5 kg
Inner 2Way Tray-J1	Tray Capacity (with 80 gsm paper):
	Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R,
	Custom Size (98.4 x 139.7 mm to 320.0 x 457.2 mm): 100 Sheets Lower Tray: A4, A5, A5R, A6R, B5, B5R: 250 Sheets
	SRA3, A3, A4R, B4, Custom Size (98.4 x 139.7 to 320.0 x
	457.2 mm): 100 Sheets
	Paper Weight: 52 to 300 gsm Dimensions (W x D x H): 426 x 407 x 76 mm
	Weight: 0.7 kg
nner Finisher-K1	Tray Capacity (with 80gsm paper):
	Upper Tray: A4, A5, A5R, B5: 100 Sheets
	SRA3, A3, A4R, A6R, B4, B5R: 50 Sheets
	Lower Tray: A4, A5, A5R, B5: 500 Sheets
	SRA3, A3, A4R, B4, B5R: 250 sheets, A6R: 30 Sheets
	Envelope: 10 sheets
	Paper Weight: 52 to 300 gsm
	Staple Position: Corner, Double Staple Capacity:
	A4, B5: 50 Sheets (52 to 90 gsm)
	A3, A4R, B4: 30 Sheets (52 to 90 gsm) Eco Staple:
	A3, A4, B4, B5: 5 Sheets (52 to 64 gsm)
	4 Sheets (65 to 81.4 gsm)
	3 Sheets (82 to 105 gsm) Staple On-demand: 40 Sheets (80 gsm)
	Dimensions (W x D x H): 634 x 525 x 188 mm
	(when the extension tray is extended)
	Weight: Approx. 8.0 kg
taple Finisher-AA1	Tray Capacity (with 80gsm paper): Upper Tray:
	A4, A5, A5R, A6R, B5: 250 sheets
	SRA3, A3, A4R, B4, B5R: 125 Sheets
	Lower Tray: A4, A5, A5R, B5: 3,000 Sheets SRA3, A3, A4R, B4, B5R: 1,500 Sheets
	A6R: 250 sheets
	Envelope: Monarch 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets
	Paper Weight: Upper Tray: 52 to 256 gsm
	Lower Tray: 52 to 300 gsm
	Staple Position: Corner, Double
	Staple Capacity: A4, B5: 50 sheets (52 to 90 gsm)
	A3, A4R, B4: 30 sheets (52 to 90 gsm)
	Eco Staple: A3, A4: 5 Sheets (52 to 64 gsm)
	4 Sheets (65 to 81.4 gsm)
	3 Sheets (82 to 105 gsm)
	Staple On-demand: 50 Sheets (90 gsm)
	Power Source: From the Main Unit Dimensions (W \times D \times H): 637 \times 623 \times 1,016 mm
	(when the extension tray is extended)
	Weight: Approx. 30.0 kg
Booklet Finisher-AA1	(Includes the Staple Finisher-AA1 basic staple specifications)
	Booklet Stitch Paper Size: A3, A4R, B4 Booklet Stitch Staple Capacity: 20 Sheets (52 to 81.4 gsm) x 10 sets (including 1 cover
	sheet up to 256 gsm)
	Non Staple Folded Bunch Capacity: 3 Sheets (52 to 105 gsm) Power Source: From the Main Unit
	Dimensions (W x D x H): 637 x 623 x 1,016 mm
	(when the extension tray is extended)
2/211-1- Durantes 11 1: 14	Weight: Approx. 53.0 kg
2/3 Hole Puncher Unit-A1	(Requires either the Staple Finisher-AA1 or Booklet Finisher-AA1) Two or Three Holes
	Acceptable Punch Paper Weight: 52 to 300 gsm
	Acceptable Punch Paper Size:
	Two Holes: A3, A4, A4R, A5, B4, B5, B5R Three Holes: A3, A4, B4, B5
	Two Holes: A3, A4, A4R, A5, B4, B5, B5R Three Holes: A3, A4, B4, B5 Power Source: From the Finisher
/4 Hole Puncher Unit-A1	Three Holes: A3, A4, B4, B5
/4 Hole Puncher Unit-A1	Three Holes: A3, A4, B4, B5 Power Source: From the Finisher (Requires either the Staple Finisher-AA1 or Booklet Finisher-AA1) Two or Four Holes
/4 Hole Puncher Unit-A1	Three Holes: A3, A4, B4, B5 Power Source: From the Finisher (Requires either the Staple Finisher-AA1 or Booklet Finisher-AA1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm
/4 Hole Puncher Unit-A1	Three Holes: A3, A4, B4, B5 Power Source: From the Finisher (Requires either the Staple Finisher-AA1 or Booklet Finisher-AA1) Two or Four Holes

Hardware Accessories	
Others	Utility Tray-B1
Security Options	
Data Security	2.5 inch/ITB HDD-P1
System and Controller Op	tions
Print Accessories	PS Printer Kit-BJ1, PCL International Font Set-A1
Barcode Printing	Barcode Printing Kit-D1
System Accessories	Copy Control Interface Kit-A1, Serial Interface Kit-K3, Connection Kit-A2 for Bluetooth LE, NFC Kit-E1
Fax Accessories	Super G3 FAX Board-AZ1, Super G3 2nd Line Fax Board-AU1, Remote Fax Kit-A1, IP FAX Expansion Kit-B1
Other Options	
Accessibility Accessories	ADF Access Handle-A1, Voice Guidance Kit-G1, Voice Operation Kit-D1
Consumables	Staple-P1. Staple Cartridge-Y1







Canon Australia Pty Ltd 1800 444 199 canon.com.au/business Canon New Zealand Ltd 0800 222 666 canon.co.nz/business